

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
74AVCH4T245RGYRG4	VQFN	RGY	16	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1
74AVCH4T245RSVR-NT	UQFN	RSV	16	3000	180.0	8.4	2.0	2.8	0.7	4.0	8.0	Q1
74AVCH4T245RSVRG4	UQFN	RSV	16	3000	180.0	12.4	2.1	2.9	0.75	4.0	12.0	Q1
SN74AVCH4T245DGVR	TVSOP	DGV	16	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74AVCH4T245DR	SOIC	D	16	2500	330.0	16.4	6.5	10.3	2.1	8.0	16.0	Q1
SN74AVCH4T245PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AVCH4T245PWT	TSSOP	PW	16	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74AVCH4T245RGYR	VQFN	RGY	16	3000	330.0	12.4	3.8	4.3	1.5	8.0	12.0	Q1


TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
74AVCH4T245RGYRG4	VQFN	RGY	16	3000	353.0	353.0	32.0
74AVCH4T245RSVR-NT	UQFN	RSV	16	3000	200.0	183.0	25.0
74AVCH4T245RSVRG4	UQFN	RSV	16	3000	200.0	183.0	25.0
SN74AVCH4T245DGVR	TVSOP	DGV	16	2000	353.0	353.0	32.0
SN74AVCH4T245DR	SOIC	D	16	2500	340.5	336.1	32.0
SN74AVCH4T245PWR	TSSOP	PW	16	2000	353.0	353.0	32.0
SN74AVCH4T245PWT	TSSOP	PW	16	250	353.0	353.0	32.0
SN74AVCH4T245RGYR	VQFN	RGY	16	3000	353.0	353.0	32.0

TUBE

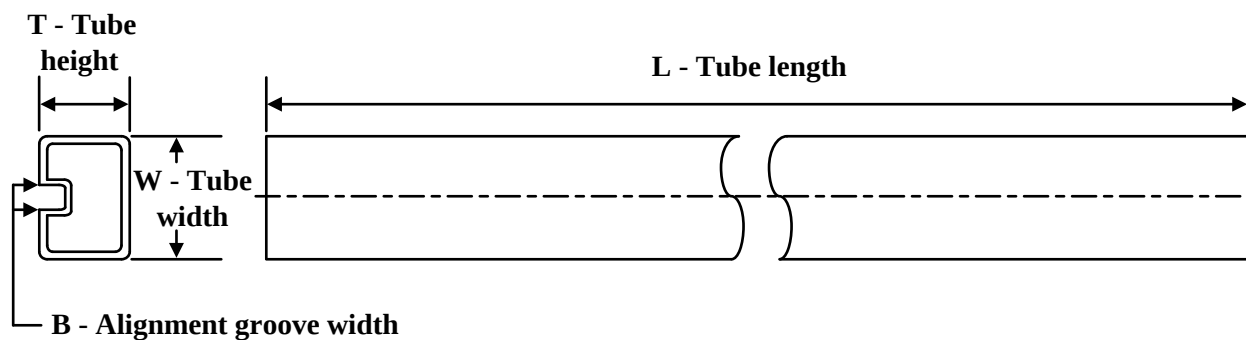

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
SN74AVCH4T245D	D	SOIC	16	40	507	8	3940	4.32
SN74AVCH4T245D.B	D	SOIC	16	40	507	8	3940	4.32
SN74AVCH4T245PW	PW	TSSOP	16	90	530	10.2	3600	3.5
SN74AVCH4T245PW.B	PW	TSSOP	16	90	530	10.2	3600	3.5
SN74AVCH4T245PWE4	PW	TSSOP	16	90	530	10.2	3600	3.5